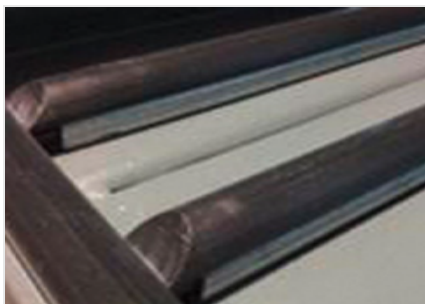


## FAZ 2800

### Assembly centres



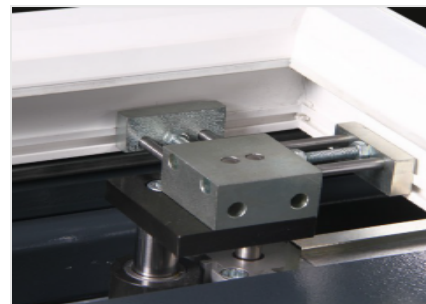
Sash assembly centre for installing hardware on PVC and aluminium window sashes. Ergonomic fixing of hardware in a very short time. Sash assembly table for measuring and cutting to length of hardware components. Optimisation of sash processing by carrying out various work tasks at a single workstation. Assembly table can be tilted pneumatically. The sash, measurement and centring units can be moved pneumatically. Gear cropper with stops for a centred and consistent handle position. Two stop blocks for different sash widths. Mobile screwing unit with pneumatic height adjustment. Manual insertion funnel for second screw length. Automatic depth shutoff. Screw feed unit. Table supporting surface with plastic slide bars.

**Supporting surfaces**

Supporting surfaces with plastic slide bars

**Screwing unit**

Mobile screwing unit with pneumatic height adjustment. Manual insertion funnel for second screw length. Automatic depth shutoff

**Stop block**

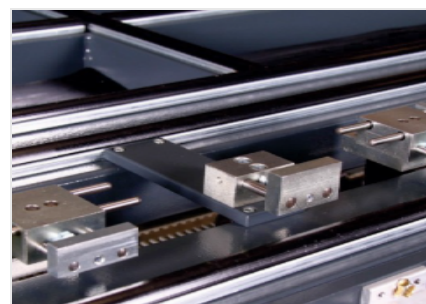
Two stop blocks for two sash widths

**Gear cropper**

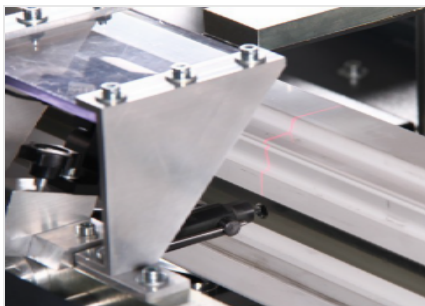
Gear cropper with stops for a centred and consistent handle position. Gear cropper with open cutting tool

**Screw feed unit**

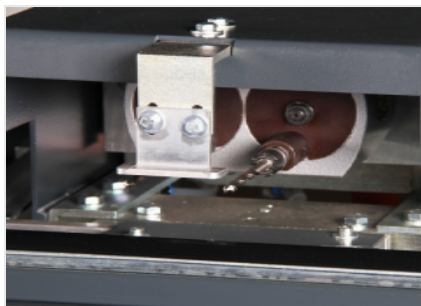
Screw feed unit with automatic screw feeding

**Stop block (Optional)**

Stop blocks for additional sash widths

**Laser unit (Optional)**

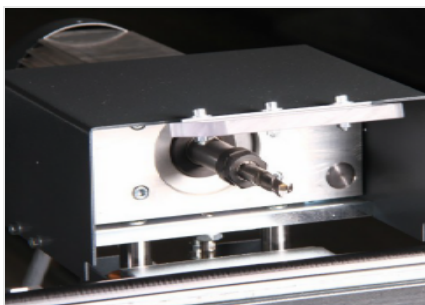
Laser for screw driving position

**Hinge drilling unit (Optional)**

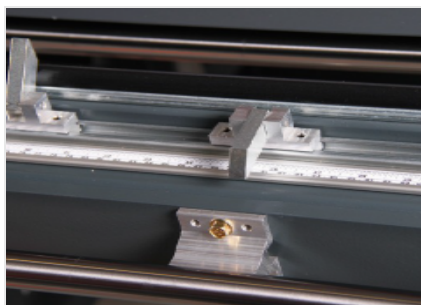
Hinge drilling unit with adjustable twospindle boring head, pneumatic height adjustment, with stops for the left and right drilling positions

**Handle hole drilling unit (Optional)**

Handle hole drilling unit installed at a fixed position with hydro-pneumatic drill feed and clamping unit; 3-spindle boring head

**Lock case milling unit (Optional)**

Milling unit can be moved manually with stop for lock case milling. Cutter diameter 12 mm

**Folding stops (Optional)**

Stop rail with 14 folding stops for a consistent handle position (7x left, 7x right)

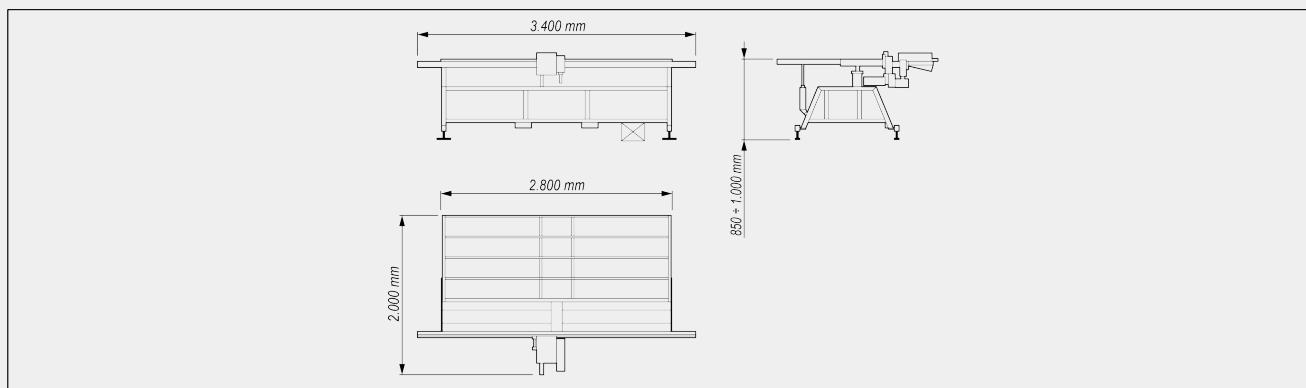
**Hardware rack (Optional)**

For orderly hardware storage at the sash assembly station



### FAZ 2800 / ASSEMBLY CENTRES

#### LAYOUT



The overall dimensions may vary depending on the product configuration.

#### CHARACTERISTICS

|                              |             |
|------------------------------|-------------|
| Table length (mm)            | 2.800       |
| Table width (mm)             | 1.400       |
| Total length (mm)            | 3.400       |
| Total width (mm)             | 2.000       |
| Weight (kg)                  | 450         |
| Table height adjustable (mm) | 850 - 1.000 |
| Table inclination (°)        | 15          |
| Sash inside dimensions (mm)  | 280 - 2.300 |

#### SCREW DIMENSIONS

|                      |           |
|----------------------|-----------|
| Head diameters (mm)  | 5,0 - 9,0 |
| Shank diameters (mm) | 3,5 - 4,5 |
| Length approx. (mm)  | 10 - 35   |

#### AIR CONSUMPTION

|                                     |     |
|-------------------------------------|-----|
| Screw driving unit approx. (l/min.) | 250 |
| Clamping unit approx. (l/min.)      | 35  |

#### PNEUMATIC CONNECTION

|                 |      |
|-----------------|------|
| Pressure (bar)  | 7    |
| Hose connection | DN10 |

Voilàp S.p.A.  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY

Tel 059 895411  
Fax: 059 859404  
P.IVA e C.F. 02057270361  
info@somecopvc.com  
www.somecopvc.com

The right to make technical alterations is reserved.



Included ● Available ○

**Voilàp S.p.A.**  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY

Tel 059 895411  
Fax: 059 859404  
P.IVA e C.F. 02057270361  
info@somecopvc.com  
www.somecopvc.com

The right to make technical alterations is reserved.