(someco)

a voilàp company

AMS VIS

MANUAL POSITIONING



Stop gauge system with profile support, positioning of the stop via handwheel and reading of position on the digital readout. Tolerance on positioning 0.5 mm.

Voilàp S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY


Tel 059 895411
Fax: 059 859404
P.IVA e C.F. 02057270361
info@somecopvc.com
www.somecopvc.com

The right to make technical alterations is reserved.




Digital reader

Digital display that allows reprogramming of machine 0, indicating the stop positioning dimension, which corresponds to the length of the workpiece to be cut.

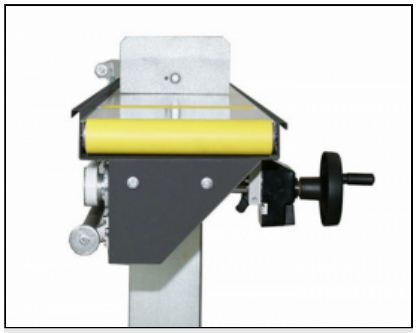

Handwheel

By means of the handwheel, the stop is brought into position.

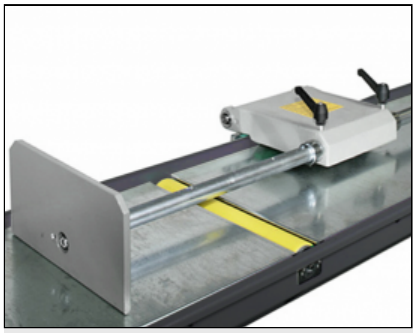

Reference stop

Carriage running on ball bushing actuated by mechanically controlled kinematics, which allows, referring to the centre of the blade, the realization of the length of the workpiece to be cut.

Voilàp S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel 059 895411
Fax: 059 859404
P.IVA e C.F. 02057270361
info@somecopvc.com
www.somecopvc.com

The right to make technical alterations is reserved.

AMS VIS / MANUAL POSITIONING

MACHINE SPECIFICATIONS

Effective stroke (according to model) (mm)	3.780 ; 5.780
Positioning tolerance (mm)	± 0,5 (*)

(*) The machine does not have a thermal deformation compensation system. The reported information refers to a temperature of 20°C

Included ● Available ○

Voilàp S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel 059 895411
Fax: 059 859404
P.IVA e C.F. 02057270361
info@somecopvc.com
www.somecopvc.com

The right to make technical alterations is reserved.