



## KW 1

### Transport and trolleys




Commissioning trolley for in-house transportation of window elements. Stable steel construction. For in-house transportation. Profile supports with rubber surface. Four swivel castors, two of which with locking stop.




### Casters

Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling

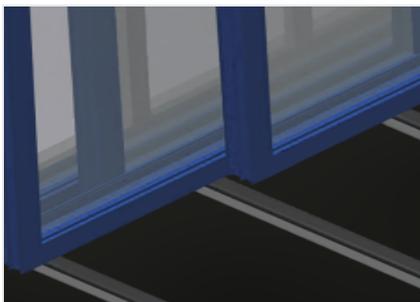

### Supports with rubber strip

Supporting surfaces equipped with rubber strips to protect profiles from damage

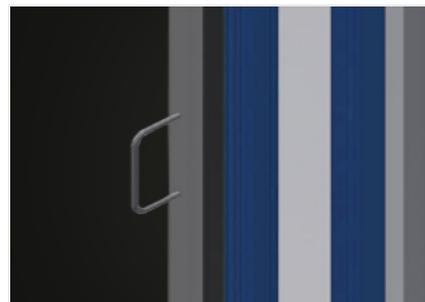

### Transport handles

Transport handle on both sides for mobility



**KW 1 / TRANSPORT AND TROLLEYS**

**DIMENSION AND WEIGHT**

|             |       |
|-------------|-------|
| Length (mm) | 1.690 |
| Width (mm)  | 910   |
| Height (mm) | 1.768 |
| Weight (kg) | 100   |

**STORAGE CAPACITY**

|                    |     |
|--------------------|-----|
| Load capacity (kg) | 400 |
|--------------------|-----|

**CHARACTERISTICS**

|                                  |     |
|----------------------------------|-----|
| Swivel castors                   | 4   |
| Swivel castors with locking stop | 2   |
| Swivel castors diameter (mm)     | 125 |

Included ● Available ○