



KW 3

Transport and trolleys




Commissioning trolley for in-house transportation of window elements. Stable steel construction. For in-house transportation. Profile supports with rubber surface. Can be nested when not loaded – a space-saving feature. Four swivel castors, two of which with locking stop.

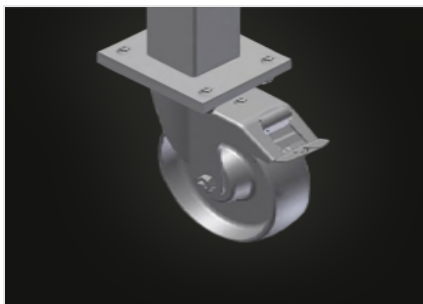

Casters

Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling

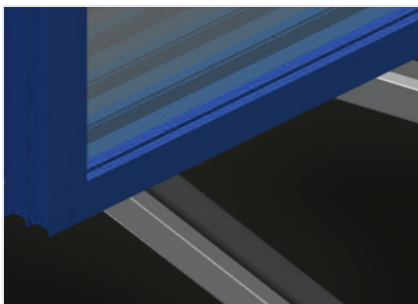

Supports with rubber strip

Supporting surfaces equipped with rubber strips to protect profiles from damage



Transport handles

Transport handle on both sides for mobility

**KW 3 / TRANSPORT AND TROLLEYS****DIMENSION AND WEIGHT**

Length (mm)	1.600
Width (mm)	1.130
Height (mm)	1.960
Weight (kg)	90

STORAGE CAPACITY

Load capacity (kg)	400
--------------------	-----

CHARACTERISTICS

Horizontally stackable when not loaded	●
Swivel castors	4
Swivel castors with locking stop	2
Swivel castors diameter (mm)	125

Included ● Available ○