


KW 4**Transport and trolleys**

Commissioning trolley for in-house transportation of window elements. Stable steel construction. Trolley for in-house transportation. Openings for forklift transportation. Four hooks for crane transportation. Four lashing strap attachment points. Profile supports with rubber surface. Castors can be removed for increased stability of the commissioning trolley. Four swivel castors, two of which with locking stop.

Voiàp S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY


Tel 059 895411
Fax: 059 859404
P.IVA e C.F. 02057270361
info@somecopvc.com
www.somecopvc.com

The right to make technical alterations is reserved.

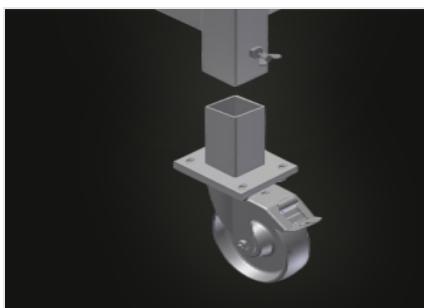


Removable casters

Casters can be removed for increased stability of the commissioning trolley on the floor. Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling

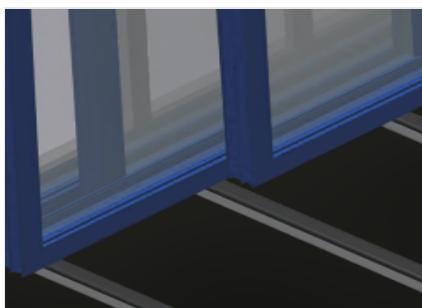


Supports with rubber strip

Supporting surfaces equipped with rubber strips to protect profiles from damage

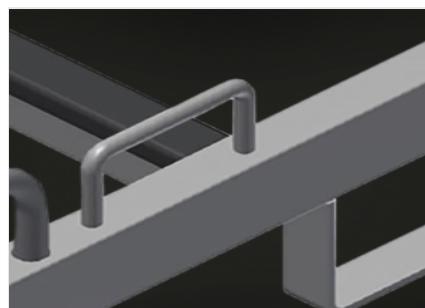


Lashing strap attachment points

With four lashing strap attachment points

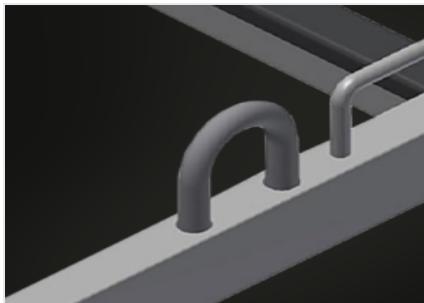


Crane attachment points

Equipped with four crane attachment points

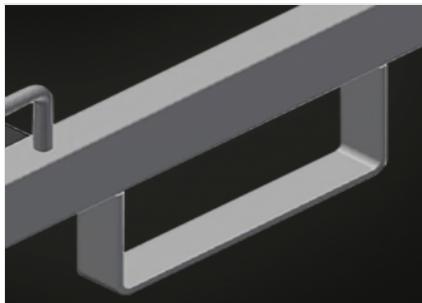

Forklift openings

Equipped with four forklift openings

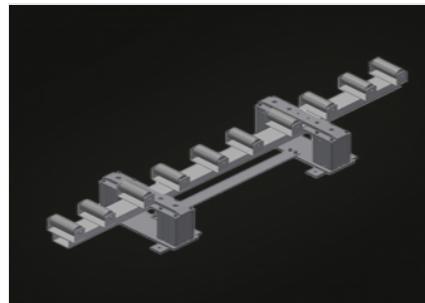

Lifting station (Optional)

HBR 1600 Lifting station for the transfer of heavy windows to the transport trolley KW 4

KW 4 / TRANSPORT AND TROLLEYS

DIMENSION AND WEIGHT

Length (mm)	2.000
Width (mm)	1.000
Height (mm)	1.850
Weight (kg)	150

STORAGE CAPACITY

Load capacity (kg)	500
--------------------	-----

CHARACTERISTICS

Openings for forklift transportation	●
Hooks for crane transportation	4
Lashing strap attachment points	4
Lifting station for the transfer of heavy windows	○
Swivel castors	4
Swivel castors with locking stop	2
Swivel castors diameter (mm)	125

Included ● Available ○