




PWS 1400

Transport and trolleys




Profile trolley for vertical storage and transportation of aluminium profiles. Stable steel construction. Ideal for transportation and space-saving intermediate storage of cut-to-length profiles. Vertical profile transportation. Sufficient for 30 - 40 profile bars. Compartment divider height is adjustable. Lower supporting surface with rubber strips. Compartment dividers with protective tubing. Rear back support with rubber strips. Four swivel castors, two of which with locking stop.

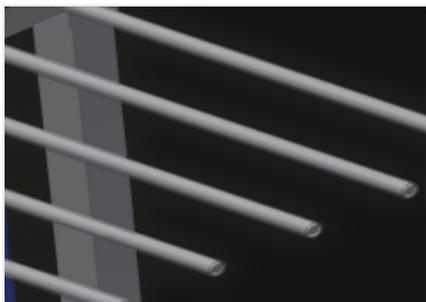


Compartment divider with plastic protector

Compartment divider height is adjustable. All supporting surfaces have a non-slip PVC cladding which protects surfaces from damage during storage

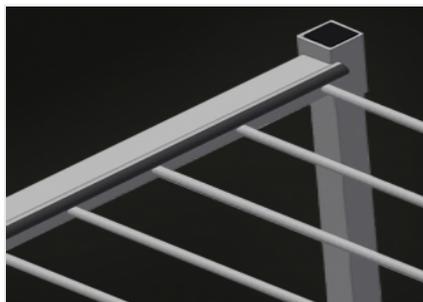

Back support with rubber strips

Rear supporting surfaces equipped with rubber strips protect profiles from damage

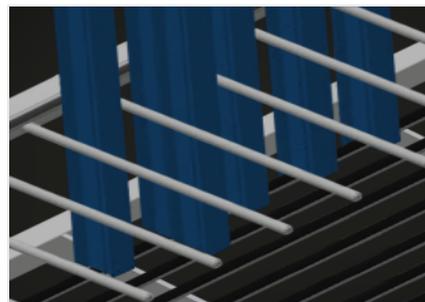

Lower supporting surfaces with rubber strips

Lower supporting surfaces equipped with rubber strips to protect the profiles from damage



Casters

Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling



PWS 1400 / TRANSPORT AND TROLLEYS

DIMENSION AND WEIGHT

| | |
|-------------|-------|
| Length (mm) | 1.440 |
| Width (mm) | 790 |
| Height (mm) | 1.360 |
| Weight (kg) | 72 |

STORAGE CAPACITY

| | |
|--------------------------|---------|
| Compartment dividers | 2 |
| Compartments | 9 |
| Compartment width (mm) | 120 |
| Compartment depth (mm) | 540 |
| Support height (mm) | 1.150 |
| Load capacity (kg) | 350 |
| Quantity of profile bars | 30 - 40 |

CHARACTERISTICS

| | |
|---|-----|
| Profile trolley with loading on one side | ● |
| Compartment dividers with protective tubing | ● |
| Lower supporting surface with rubber strips | ● |
| Rear back support with rubber strips | ● |
| Swivel castors diameter (mm) | 125 |

Included ● Available ○