



## **SBZ 608**

Cutting and machining  
centers



A fast downstream centre for reinforcement screw driving, drilling and routing cut-to-length profiles for window, door and curtain wall manufacturing with and without steel reinforcement. Portal design for high profile cross-sections and process-optimised throughput.

**Voilàp S.p.A.**  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY

Tel 059 895411  
Fax: 059 859404  
P.IVA e C.F. 02057270361  
info@somecopvc.com  
www.somecopvc.com

The right to make technical alterations is reserved.



LAYOUT

Left version (left to right)



Right version (right to left)



- A - Loading magazine
- B - Machining unit
- C - Unloading magazine
- \* - Standard version

The overall dimensions may vary depending on the product configuration.

AXIS TRAVEL

Y AXIS (cross) (mm)	370
Z AXIS (vertical) (mm)	270
X AXIS (bar positioning) (mm)	5.620
Y1 AXIS (cross gripper positioning) (mm)	130
Z1 AXIS (vertical gripper positioning) (mm)	145
A1 AXIS (gripper rotation)	280°

Voilàp S.p.A.  
 Via Archimede, 10  
 41019 - Limidi di Soliera (MO)  
 ITALY

Tel 059 895411  
 Fax: 059 859404  
 P.IVA e C.F. 02057270361  
 info@somecopvc.com  
 www.somecopvc.com

The right to make technical alterations is reserved.

**LOADING UNIT: PROFILE POSITIONING**

Workpiece reference stop near the working unit	●
Maximum loadable length (mm)	4.000
Belt loading magazine for 14 profiles with a length varying from 350 mm to 4.000 mm, max. weight 40 kg	●
Loading feeder with 2 controlled axes for workpieces of up to 4.000 mm with gripper	●
Electronically controlled 0 - 180° collet rotation (C1 axis)	●
Minimum machinable profile section - W x H (mm)	30 x 30

**ELECTROSPINDLES FOR PVC MILLING (MANUAL CHANGE)**

Maximum power in S6 (kW)	0,75
Maximum speed (rpm)	16.300
Maximum diameter (mm)	12

**ELECTROSPINDLES FOR HANDLE DRILLING (MANUAL CHANGE)**

Maximum power in S6 (kW)	1,6
Maximum speed (rpm)	2.456
Maximum diameter for 3-spindle aggregate (mm max.)	12 / 14 / 12

**ELECTROSPINDLES FOR SMALL DIAMETER PVC & STEEL (MANUAL CHANGE) OPTIONAL**

Maximum power in S6 (kW)	1,2
Maximum speed (rpm)	9.820
Maximum diameter (mm)	12

**ELECTROSPINDLES FOR END MILLING (MANUAL CHANGE) OPTIONAL**

Maximum power in S6 (kW)	1,6
Maximum speed (rpm)	5.600
Maximum diameter (mm)	160




WORKABLE SIDES

Number of faces (top, side, bottom)

1 + 2 + 1

WORK AREA

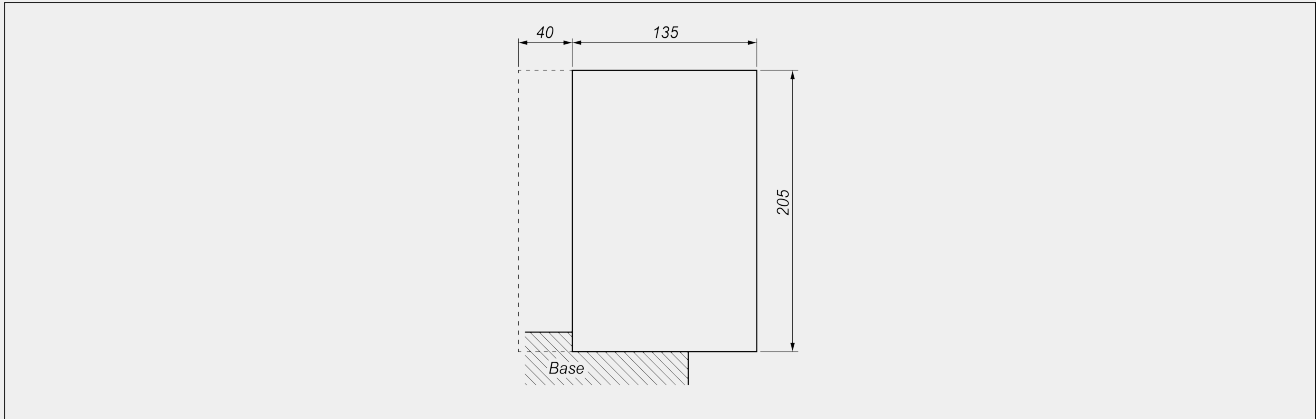

\_\_\_\_\_ max. profile area

----- max. overlap

WORKPIECE LOCKING

Automatic fixed clamping system before machining area

Automatic fixed clamping system after machining area

Clamping system standard height 20 mm

Clamping system for profile adapted to profile system

MODES OF OPERATION

Screwing operation for reinforcement steel

Milling, drilling operations of the piece direct from the profiled bar

Hand held scanner for bar code

Rotary axis gripper

Blow-off devices per additional working unit

Tool package 16 units



**SUPPORT BASE**

Monolithic in electrowelded and standardised steel



**UNLOADING UNIT**

Unloading table with a pneumatic pusher for workpieces of up to 4000 mm



Belt magazine unloading depth (mm)

1.900

**ELECTRIC CABINET COOLING**

Electrical cabinet with air conditioner for operating temperatures < 45 °C



Electrical panel and CN conditioner for operating temperatures < 50°C



Included ● Available ○