



## *VE 3000/60*

Inspection and glazing  
units




Inspection and glazing unit for glazing and final inspection. Quick and precise assembly of windows, doors and elements. Stable steel construction. Precision ensured through parallel clamping bar pressing technique with manually operated pressing bars. Easy operation by means of foot switch. Pneumatic centring, storage area for tools and 4-fold compressed air supply.

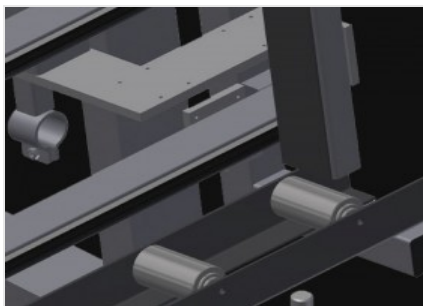


### Pressing bar

Pneumatic centring. Precision ensured through parallel clamping bar pressing technique

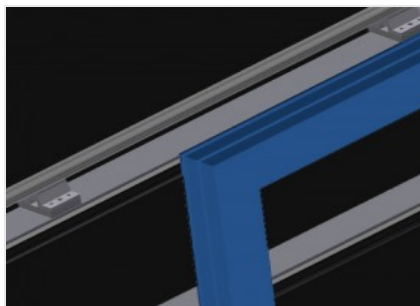


### Back support

Rear back support with plastic slide bars

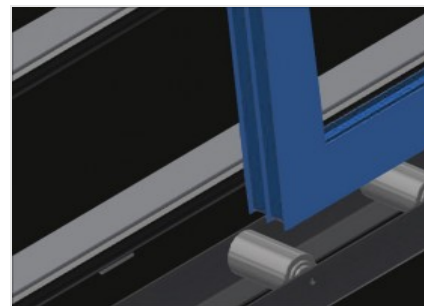


### Roller support

Lower roller conveyor with support roller, L = 120 mm

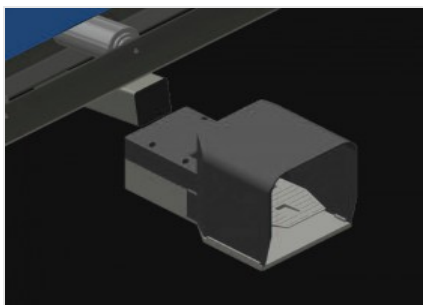


### Foot switch

All functions are controlled via foot valves

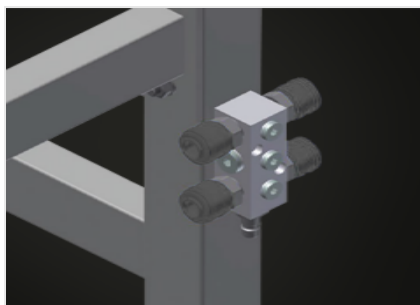

### 4-fold compressed air connection

4-fold compressed air connection for connecting compressed-air tools

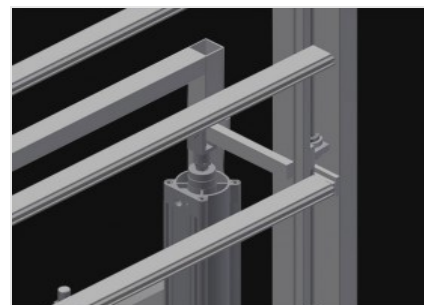

### Height adjustment (Optional)

Height continuously adjustable, L = 500 mm

**VE 3000/60 / INSPECTION AND GLAZING UNITS**
**DIMENSION AND WEIGHT**

Length (mm)	3.050
Width (mm)	900
Height (mm)	2.600
Lower roller conveyor width (mm)	120
Weight (kg)	370

**WORKPIECE LOCKING**

Maximum clamping width (mm)	2.800
Minimum clamping width (mm)	390
Clamping bar height (mm)	2.300
Clamping bar width (mm)	100
Pneumatic centring	●

**CHARACTERISTICS**

Load capacity (kg)	200
Adjustable height	○
Storage area for tools	●
4-fold compressed air supply	●
Operating air pressure (bar)	7
Air consumption approx. (l/min)	35

Included ● Available ○