





## VE 4000

Inspection and glazing  
units




Inspection and glazing unit for glazing and final inspection in individual and serial assembly line production. Quick and precise assembly of windows, doors and elements. Stable steel construction. Precision ensured through parallel clamping bar pressing technique. Height continuously adjustable. Easy operation by means of foot switch. Two pressing bars which fold down and can be moved pneumatically and 4-fold compressed air supply.

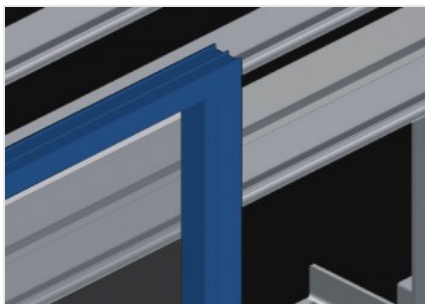


**Back support**

Rear back support with plastic slide bars

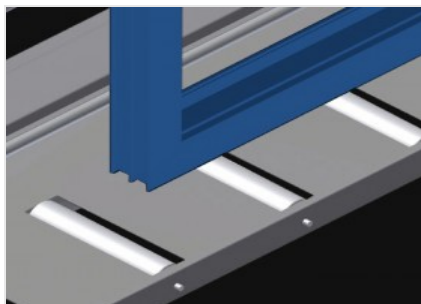


**Roller support**

Lower roller conveyor with support roller, L = 200 mm

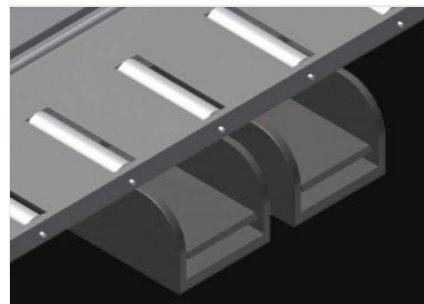

**Foot switch**

All functions are controlled via foot valves

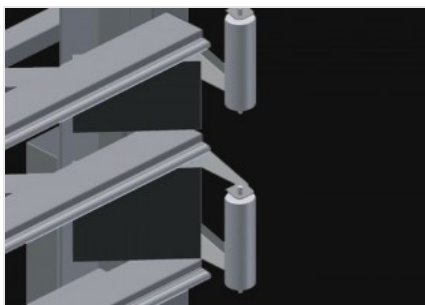


**Pressing bar**

Simultaneous folding and moving of the pressing bars ensure a minimum of time is required for opening and closing the press. Allows free pass-through of the window



**Left lead-in rollers (Optional)**

Protective rollers for beginning or end of roller conveyor

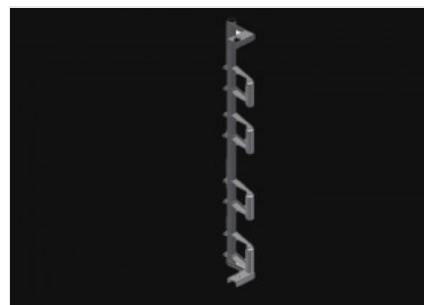

**Right lead-in rollers (Optional)**


Protective rollers for beginning or end of roller conveyor



**Voilàp S.p.A.**  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY


Tel 059 895411  
Fax: 059 859404  
P.IVA e C.F. 02057270361  
info@somecopvc.com  
www.somecopvc.com

The right to make technical alterations is reserved.

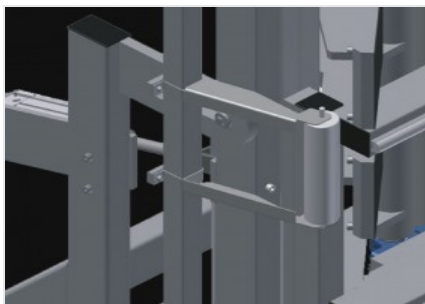


**Tilt adjustment of 0° - 8° (Optional)**

Pneumatic tilt adjustment of 0° - 8°

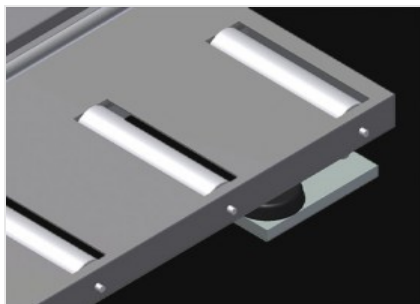


**Profile protectors (Optional)**

Profile protectors for support rollers 200 mm. Support rollers covered with protective tubing

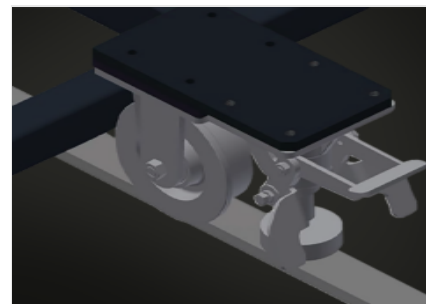

**Mobility unit (Optional)**

Mobility unit for KT/KTH/MS/VE.  
Mobility unit with flanged rollers and fixing brake

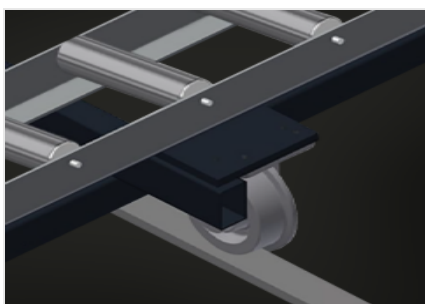

**Rails (Optional)**

Rails, 2.0 m, left and right

## VE 4000 / INSPECTION AND GLAZING UNITS

## CHARACTERISTICS

Length (mm)	5.440
Width (mm)	1.180
Height (mm)	2.600
Maximum clamping width (mm)	4.000
Minimum clamping width (mm)	390
Adjustable height (mm)	500
Clamping bar height (mm)	2.300
Clamping bar width (mm)	200
Height continuously adjustable	<input checked="" type="radio"/>
Lower roller conveyor width (mm)	200
Weight (kg)	580
Load capacity (kg)	200
4-fold compressed air supply	<input checked="" type="radio"/>
Operating air pressure (bar)	7
Air consumption approx. (l/min.)	35
Lead-in rollers right, complete L= 2052 mm	<input type="radio"/>
Lead-in rollers left, complete L= 2052 mm	<input type="radio"/>
Mobility unit	<input type="radio"/>
Rail 2,0 m left and right	<input type="radio"/>
Profile protectors for L= 200 mm	<input type="radio"/>
Pneumatic tilt adjustment of 0° - 8°	<input type="radio"/>

Included ● Available ○