

**VR 4003 DF**

Vertical Rollers Conveyors

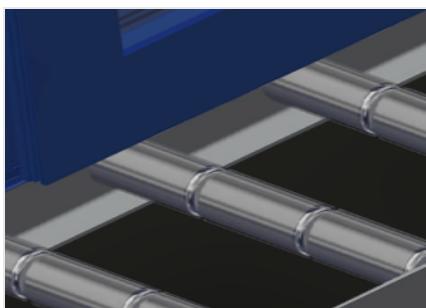


Stable steel construction. Vertical roller conveyor for smooth transportation to the next work task as well as for transportation to storage and sorting of the finished windows. Easy handling of window elements. Every roller conveyor unit is 4.000 mm long. Plastic slide bars top and bottom. Three mini-roller conveyors with rubber rollers, diameter 50 mm. Basic unit with end rack. Vertical roller conveyor on rails with flanged rollers, mobile. Roller conveyor can be rotated 360°.

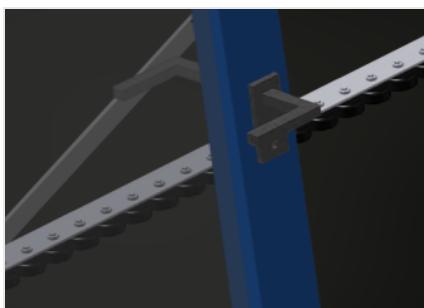
**Voiàp S.p.A.**  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY

Tel 059 895411  
Fax: 059 859404  
P.IVA e C.F. 02057270361  
info@somecopvc.com  
www.somecopvc.com

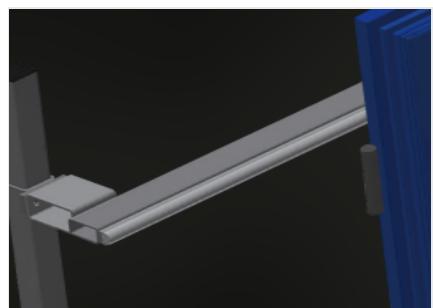
The right to make technical alterations is reserved.

**Support rollers**

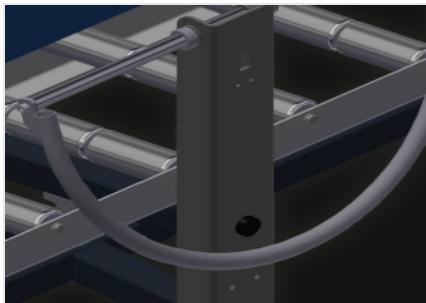
Rollers throughout, roller conveyor divided into three parts (L = 3 x 120 mm)

**Mini-roller conveyor**

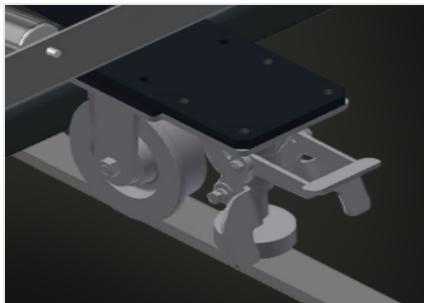
Three mini-roller conveyors with rubber rollers, diameter 50 mm

**Back support**

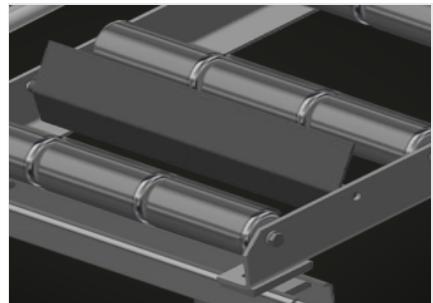
Rear back support with plastic slide bars, top and bottom

**Grip**

Grip makes pushing the roller conveyor on the rails easy

**Mobility unit**

Mobility unit with flanged rollers and fixing brake

**End stop (Optional)**

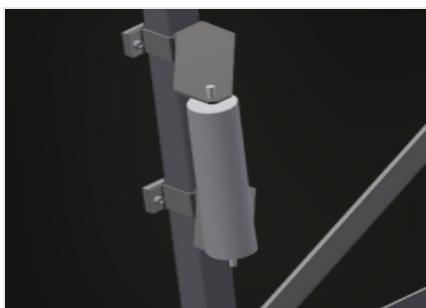
End stop L = 3x120 mm



**Voiàp S.p.A.**  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY

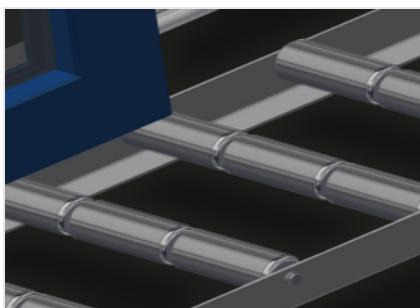
Tel 059 895411  
Fax: 059 859404  
P.IVA e C.F. 02057270361  
info@somecopvc.com  
www.somecopvc.com

The right to make technical alterations is reserved.



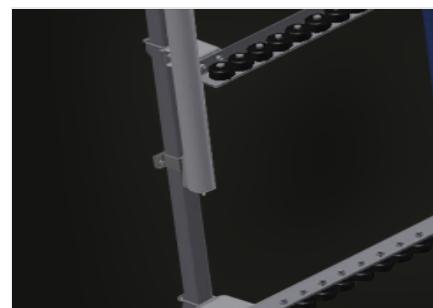
### Lead-in rollers (Optional)

Protective rollers for beginning or end of roller conveyor:  
- L = 500 mm (pair)  
- L = 250 mm (pair)



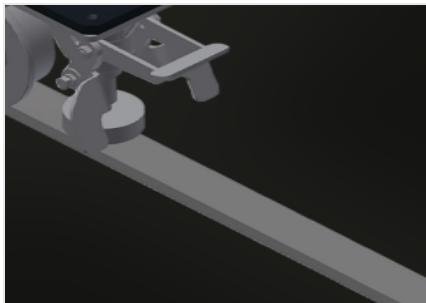
### Profile protectors (Optional)

Profile protectors for support rollers  
3x120 mm (Alum./33 x and Alum./48 x). Support rollers covered with  
protective tubing



### Additional mini-roller conveyors (Optional)

Additional mini-roller conveyors with  
rubber rollers top/bottom



### Rails (Optional)

Rails, 2.0 m, left and right

## VR 4003 DF / VERTICAL ROLLERS CONVEYORS

## DIMENSION AND WEIGHT

Length (mm)	4.000
Width (mm)	1.000
Height (mm)	2.490
Support roller divided into three parts (mm)	3 x 120
Support height (mm)	2.100
Weight (kg)	240

## CHARACTERISTICS

Load capacity (kg)	200
Mini-roller conveyors with rubber rollers, diameter 50 mm	3
Basic unit with end rack	●
Vertical roller conveyor on rails with flanged rollers mobile	●
Roller conveyor can be rotated 360°	●
Lead-in rollers L= 500 mm (pair)	○
Lead-in rollers L= 250 mm (pair)	○
Additional mini-roller conveyors with rubber rollers top/bottom	○
Profile protectors for L= 3x120 mm	○
End stop L= 3x120 mm	○
Rail 2,0 m left and right	○

Included ● Available ○

Voiàp S.p.A.  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY

Tel 059 895411  
Fax: 059 859404  
P.IVA e C.F. 02057270361  
info@somecopvc.com  
www.somecopvc.com

The right to make technical alterations is reserved.